


HERCULES Lorry Access Steps

Product Overview

Z/STEP/LORRY/HERC

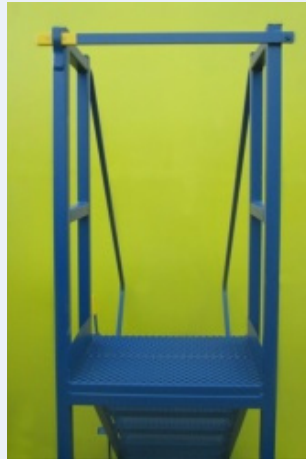

VAT Not Included
Free Delivery

Step Width

500mm - Standard
850mm - Wide

Options

Rubber Wheels
RUGGED Wheels
Galvanized
Bottom Gate
Rear Safety Bar
Swing Out Rear Stabilisers
Front Levelling Legs

Mobile Steps lead time is generally 7 days. Whilst we stock the step components, the mobile steps are built to order. We would typically allow 3 days to build the steps, a day to paint them and then despatch the mobile ladders on a 3 day service.

Specification		
Dimensions	Standard Step Width (550mm)	Wide Step Width (850mm)
Platform Height From Ground	1250mm	1250mm
Length	1460mm	1460mm
Overall Height	2250mm	2250mm
Frame Width	590mm	890mm
Overall Axle Width	760mm	1060mm
Platform Size	550mm x 380mm	850mm x 380mm
Step Tread Width	550mm x 200mm	850mm x 200mm
Step Tread Vertical Spacing	200mm	200mm
Weight Standard Width	60kg	
Load Capacity	300kg	300kg

- We have made our heavy duty access ladder from a substantial 40x40x3mm box section and, like all our mobile step range, are a fully welded one piece construction.
- The angle of the steps is 45 degrees, an easy slope step, which allows the user to walk down forward facing. The treads are our hi-grip steel treads offering excellent grip in wet oily conditions
- This 6 step mobile ladder has a platform height of 1250mm and is fitted with 2 substantial 200mm nylon wheels and 2 smaller 100mm diameter wheels housed in swivel castors allowing easy movement
- On the side of the steps is mounted a brake lever which disengages the smaller wheels when in use allowing a safe stable platform for the steps
- Also fitted is a swing access bar at the top and safety notice on the side.
- Mobile steps are painted as standard using a one coat primer/finish - Zinfos 700CT, or can be galvanized.